ZOLOTO®
VALVES
since 1966

AN ISO 9001, 14001 & 45001
CERTIFIED COMPANY

1019A Bronze Ferrule Cock

Salient Features


- Design Standard IS 2692.
- Screwed Male Ends to BSPT as per IS 554 / BS 21/ ISO 7.
- Heavy Pattern, Rough Body, Full Flow.
- Metal to Rubber contact seating.
- Can withstand heavy impact of water as well as tolerance of high sudden pressure.



Test Pressure (Hydrostatic) :
Seat : 1.5 MPa
Suitable For
Water

Materials

P.No.	Name of Part	Material of Construction	Specification	Quantity
1	Body	Bronze	IS 318 Gr. LTB 2	1
2	Nut	Brass	IS 319 Grade 1(HB)	1
3	Washer	Brass	IS 410	1
4	Resilient Washer	Rubber	—	1
5	Washer Plate	Brass	IS 319 Grade 1(HB)	1
6	Plug	Bronze	IS 318 Gr. LTB 2	1
7	Gasket	Leather	—	1
8	Cap	Bronze	IS 318 Gr. LTB 2	1

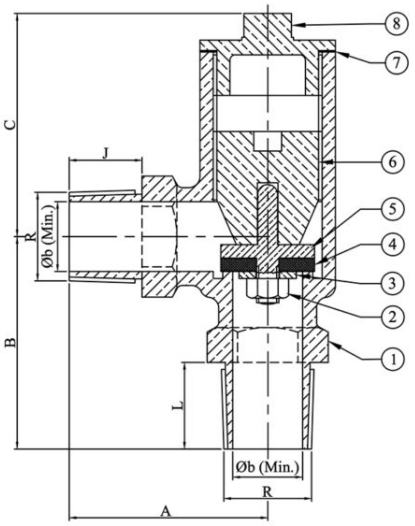

Sizes / Dimensions

Size (Inches)	Size (mm)	A+3	B+3	C±5	R	øb(Min.)	L+2	J+2
1/4	8	50	55	60	1/4″	8.0	25	17
3/8	10	50	55	60	3/8″	8.8	25	17
1/2	15	55	60	70	1/2″	12.3	25	19
3/4	20	60	65	75	3/4″	17.8	25	20
1	25	70	75	85	1″	24.5	30	25

ZOLOTO INDUSTRIES
Zoloto House, 11th Milestone, Lambra, Nakodar Road,
Jalandhar – 144026. Punjab. INDIA
https://www.zolotovalves.com
Phones : +91 181 4676666 (100 Lines)
Facsimile: +91 181 2792500 & 2251600
Email : sales@zolotovalves.com, mktg@zolotovalves.com