

1087 Bronze Double Regulating Balancing Valve (Screwed) With Nozzle, PN 16

Salient Features

- Design Reference Standard BS 7350.
- Screwed Female Ends to IS 554 / BS 21 / ISO 7.
- Precise double regulation.
- Tamper proof setting with a lock shield.
- Swift operation with un-breakable Nylon Handwheel.
- Turn Indicator on the Handwheel to help in Line balancing.
- PTFE sealing disc to ensure a proper shut off.
- Provided with Inlet / Outlet pressure test cocks.
- Facilitates system design, hence saves energy.
- Easy to install and set.
- Accentuates systematic commissioning of the plant for an optimal operation.
- Protruded design suitable for easy installation.

Test Pressure (Hydrostatic) - Shell : 24 bar (350 psig)

Maximum Operating Pressure (Hydrostatic) : 16 bar (230 psig)

Working Temperature : -10°C to 85°C




Suitable For

Water

Materials

P.No.	Name of Part	Material of Construction	Specification	Qty.
1	Body	Bronze	IS 318 Gr. LTB2	1
2	Retaining Ring	Brass	IS 319 Gr. 2	1
3	Disc Guide	Brass	IS 319 Gr. 2	1
4	Disc Facing	PTFE / Brass	- / IS 319 Gr. 2	1
5	Disc	Brass	IS 319 Gr. 2	1
6	Disc Nut	Brass	IS 319 Gr. 2	1
7	Stem	Brass	IS 319 Gr. 2	1
8	Bonnet	Brass / Bronze	IS 319 Gr. 2 / IS 318 Gr. LTB2	1
9	O-Ring	EPDM	---	2
10	Circlip	Stainless Steel	Type 304	1
11	Connecting Rod	Brass	IS 319 Gr. 2	1
12	Connecting Screw	Stainless Steel	Type 304	1
13	Internal Hex. Screw	Stainless Steel	Type 304	1
14	Handwheel Assy.	Nylon	---	1
15	Exhaust Nozzle	Brass	IS 319 Gr. 2	1
16	Exhaust Nozzle	Brass	IS 319 Gr. 2	1

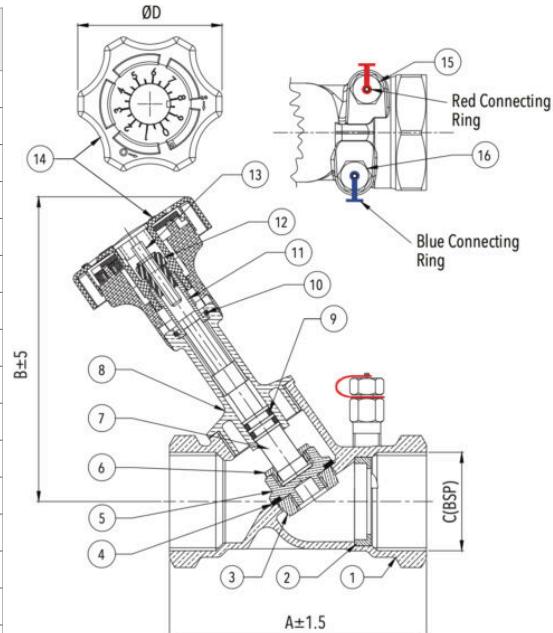

Sizes / Dimensions

Size (Inches)	Size (mm)	A ± 1.5	B ± 5	C	ØD
1/2	15	87	108	1/2"	70
3/4	20	96	110	3/4"	70
1	25	100	133	1"	70
1.1/4	32	114	133	1.1/4"	70
1.1/2	40	125	147	1.1/2"	70
2	50	146	149	2"	70

Notes : For sizes 15mm & 20mm, the disc facing shall be of Brass.

For sizes 40mm & 50mm, the bonnet shall be of Bronze.

Flow Characteristics Of Balancing Valve