

1022A Forged Brass Ball Bib Cock (Chrome Plated)

Salient Features

- Screwed Male End to IS 554 / BS 21 / ISO 7.
- Provided with Hard Chrome Plated Brass Ball.
- Quarter Turn, Lever Operated.
- Chrome Finish.


Test Pressure (Hydrostatic) :
Shell : 25 kg/cm²g (350 psig)
Seat : 16 kg/cm²g (225 psig)
Maximum Working Temperature : 220°C

Suitable For
Water



Materials

| P.No. | Name of Part | Material of Construction | Specification | Quantity |
|-------|----------------|-----------------------------------|-----------------|----------|
| 1 | Stem | Forged Brass | IS 6912 Gr. FLB | 1 |
| 2 | Nut | Brass (Chrome Plated) | --- | 1 |
| 3 | Lever | Mild Steel | --- | 1 |
| 4 | Gland | Forged Brass | IS 6912 Gr. FLB | 1 |
| 5 | Gland Packing | PTFE | --- | 1 |
| 6 | Thrust Washer | PTFE | --- | 1 |
| 7 | Adaptor | Forged Brass | IS 6912 Gr. FLB | 1 |
| 8 | Ball | Forged Brass (Hard Chrome Plated) | IS 6912 Gr. FLB | 1 |
| 9 | Body Seat Ring | PTFE | --- | 2 |
| 10 | Body | Forged Brass | IS 6912 Gr. FLB | 1 |
| 11 | Sleeve | PVC | --- | 1 |

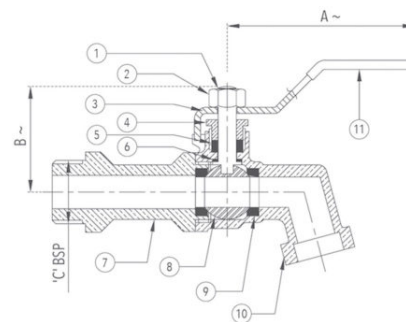

Sizes / Dimensions

| Size (Inches) | Size (mm) | A ~ | B ~ | C |
|---------------|-----------|-----|-----|------|
| 1/2 | 15 | 115 | 34 | 1/2" |

~ ±10