ZOLOTO®
VALVES
since 1966

AN ISO 9001, 14001 & 45001
CERTIFIED COMPANY

1095 Forged Brass Air Release Valve (Screwed)

Salient Features




- Screwed male end as per IS 554 / BS 21 / ISO 7.
- Chrome plated forged brass body and cover.
- Full bore.
- Sleek in design, ease of installation.
- Handy device used to release entrapped air in any piping system.
- Smooth inner valves reduce pressure loss.
- Maintains system flow efficiency.
- Brilliant aesthetic look.
- Ergonomic design.

Test Pressure (Hydrostatic) :
Shell : 15 bar (220 psig)
Seat : 10 bar (150 psig)
Maximum Working Temperature : 110°C

Suitable For
Water

Materials

P.No.	Name of Part	Material of Construction	Specification	Qty.
1	Body	Forged Brass (Chrome Plated)	IS 6912 Gr. FLB	1
2	Float	Polypropylene	– – –	1
3	Lock	Polypropylene	– – –	1
4	Hing	Polypropylene	– – –	1
5	Seat	Forged Brass	IS 6912 Gr. FLB	1
6	Chamber	Forged Brass	IS 6912 Gr. FLB	1
7	Ring	Nitrile Rubber	IS 5192 – 1	1
8	Valve	Brass	IS 319 Gr. 2	1
9	Cover	Forged Brass (Chrome Plated)	IS 6912 Gr. FLB	1
10	Ring	Nitrile Rubber	IS 5192 – 1	1
11	Spring	Stainless Steel	Type 304	1
12	Bracket	Polypropylene	– – –	1
13	'O' Ring	Nitrile Rubber	IS 5192 – 1	1
14	Strainer	Plastic	– – –	1

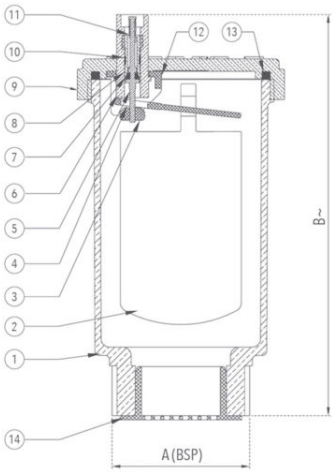

Sizes / Dimensions

Size (Inches)	Size (mm)	A	B ~
1/2	15	1/2″	75
3/4	20	3/4″	95
1	25	1″	97

~ ±10

ZOLOTO INDUSTRIES
Zoloto House, 11th Milestone, Lambra, Nakodar Road,
Jalandhar – 144026. Punjab. INDIA
https://www.zolotovalves.com
Phones : +91 181 4676666 (100 Lines)
Facsimile: +91 181 2792500 & 2251600
Email : sales@zolotovalves.com, mktg@zolotovalves.com