

1040A Bronze Compact Pressure Reducing Valve (Screwed)

Salient Features

- Screwed Female Ends to IS 554/BS 21/ISO 7.
- Most ideal for sensitive & a consistent fluid regulation.
- Rugged body, compact sized, easy to install, rarely requires maintenance & virtually noiseless.
- Trim components have a distinct edge of being Hot Brass Forged.
- Provision provided to install a pressure gauge of 1/4" B.S.P size to measure/monitor the critically relevant Outlet Pressure.
- Designed to suit every application requiring accurate pressure ratings.
- No external source of energy required.
- All 'O' rings are of superior food grade rubber, hence ensuring absolute zero health hazard.

Test Pressure (Hydrostatic) :

Shell : 35 bar

Maximum Upstream Pressure : 25 bar

Maximum Working Temperature : 90°C

NOTE : At maximum inlet pressure 25 bar, the minimum outlet pressure will be 5.5 bar.




Suitable For

Water

Materials

P.No.	Name of Part	Material of Construction	Specification	Quantity
1	Plug	Forged Brass	IS 6912 Gr. F.L.B	1
2	O - Ring	Nitrile Rubber	IS 5192 - 1	1
3	Bonnet	Bronze	IS 318 Gr. LTB 2	1
4	Disc Holder	Bronze	IS 318 Gr. LTB 2	1
5	Body	Bronze	IS 318 Gr. LTB 2	1
6	Chamber	Bronze	IS 318 Gr. LTB 2	1
7	Piston	Bronze	IS 318 Gr. LTB 2	1
8	Disc	Nitrile Rubber	IS 5192 - 1	1
9	O - Ring / Gasket	PTFE (Gasket)	---	1
10	O - Ring	Nitrile Rubber	IS 5192 - 1	1
11	O - Ring	Nitrile Rubber	IS 5192 - 1	1
12	Spring	Spring Steel	EN 47 Gr. B	1
13	Adjustable Ring	Bronze	IS 318 Gr. LTB 2	1
14	Cap / Locking Ring	Bronze (Locking Ring)	IS 318 Gr. LTB 2	1

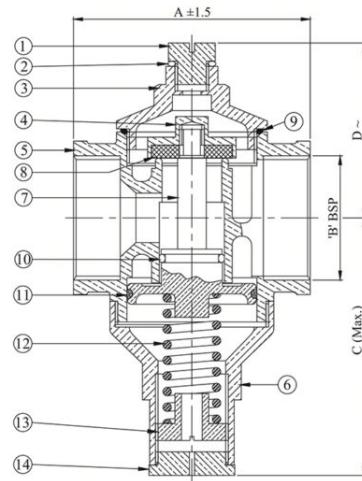

Sizes / Dimensions

Size (Inches)	Size (mm)	A ±1.5	B	C (Max.)	D ~
2 1/2	65	135	2 1/2"	160	97
3	80	160	3"	170	111
4	100	160	4"	185	125

~ ±10