



FLOW CHARACTERISTICS OF BALANCING VALVE




DN 15mm (1/2")

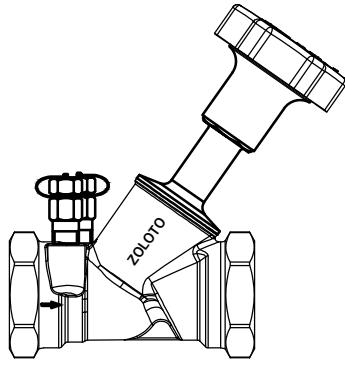

ZOLOTO INDUSTRIES
11th MILESTONE, LAMBRA
NAKODAR ROAD,
JALANDHAR

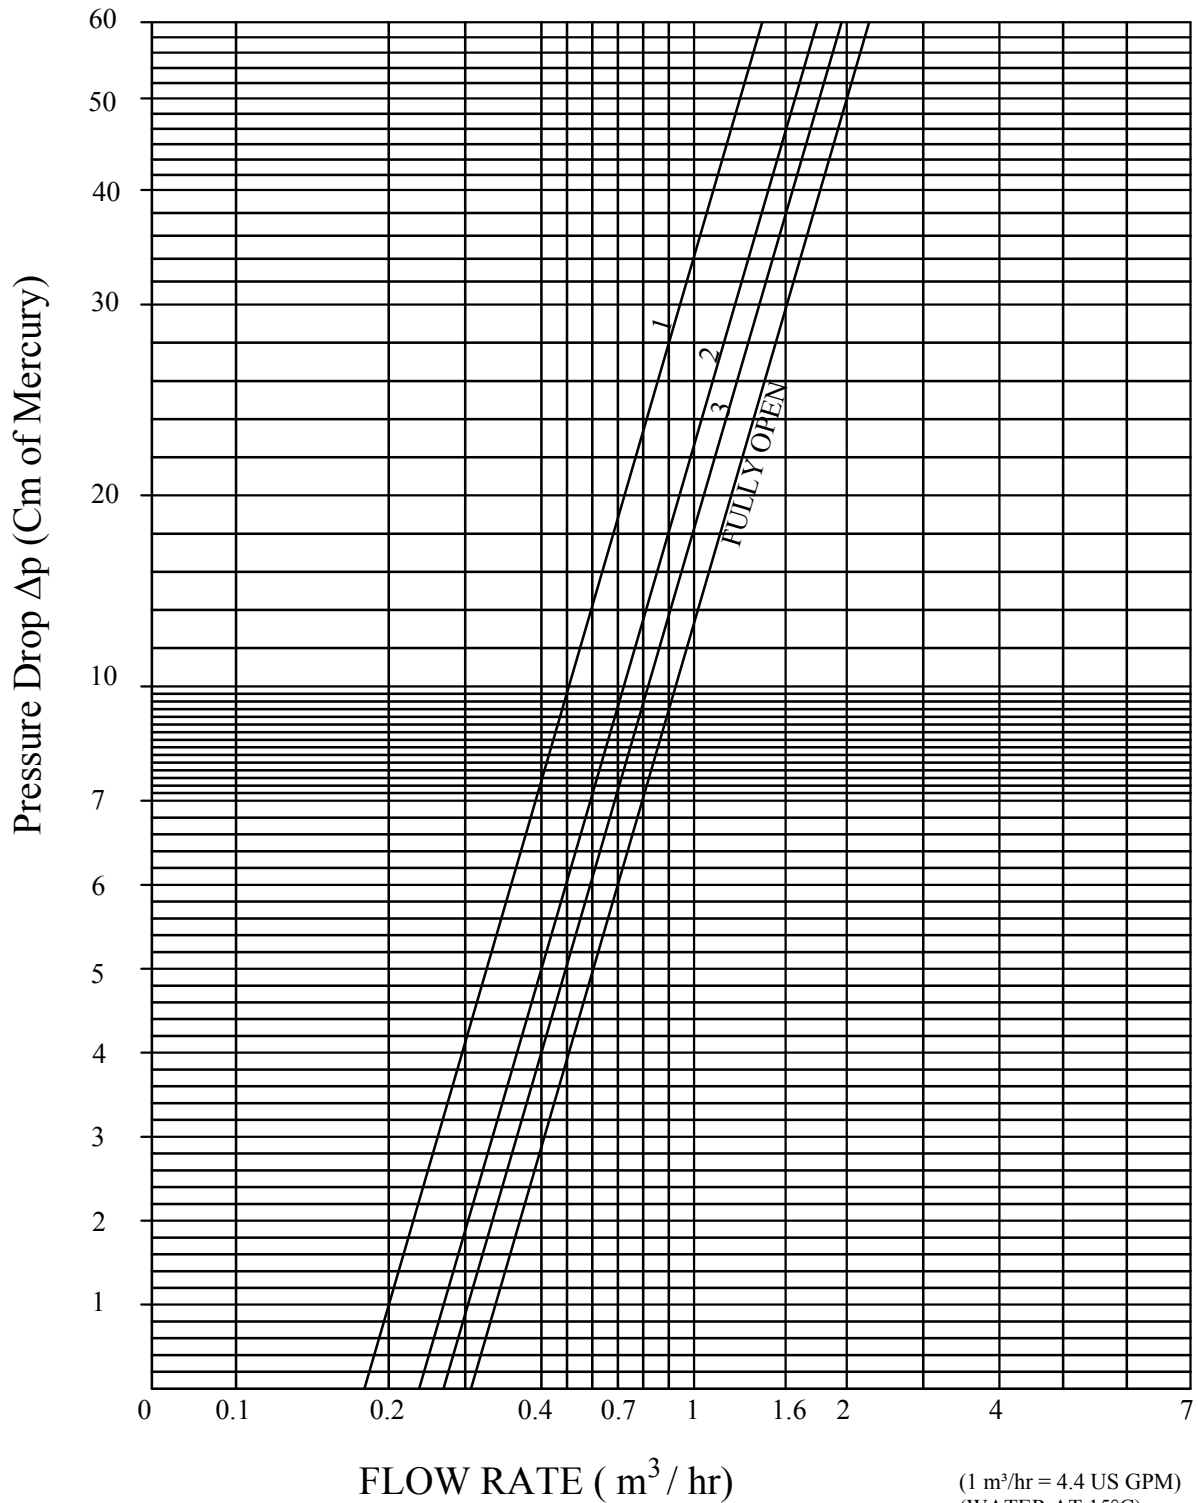


FLOW CHARACTERISTICS OF BALANCING VALVE

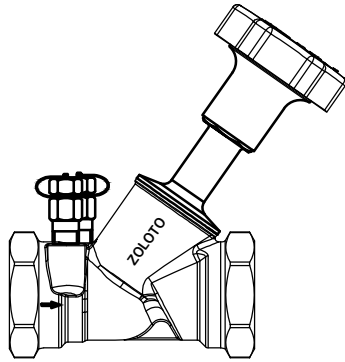


ZOLOTO INDUSTRIES
11th MILESTONE, LAMBRA
NAKODAR ROAD,
JALANDHAR

DN 20mm (3/4")

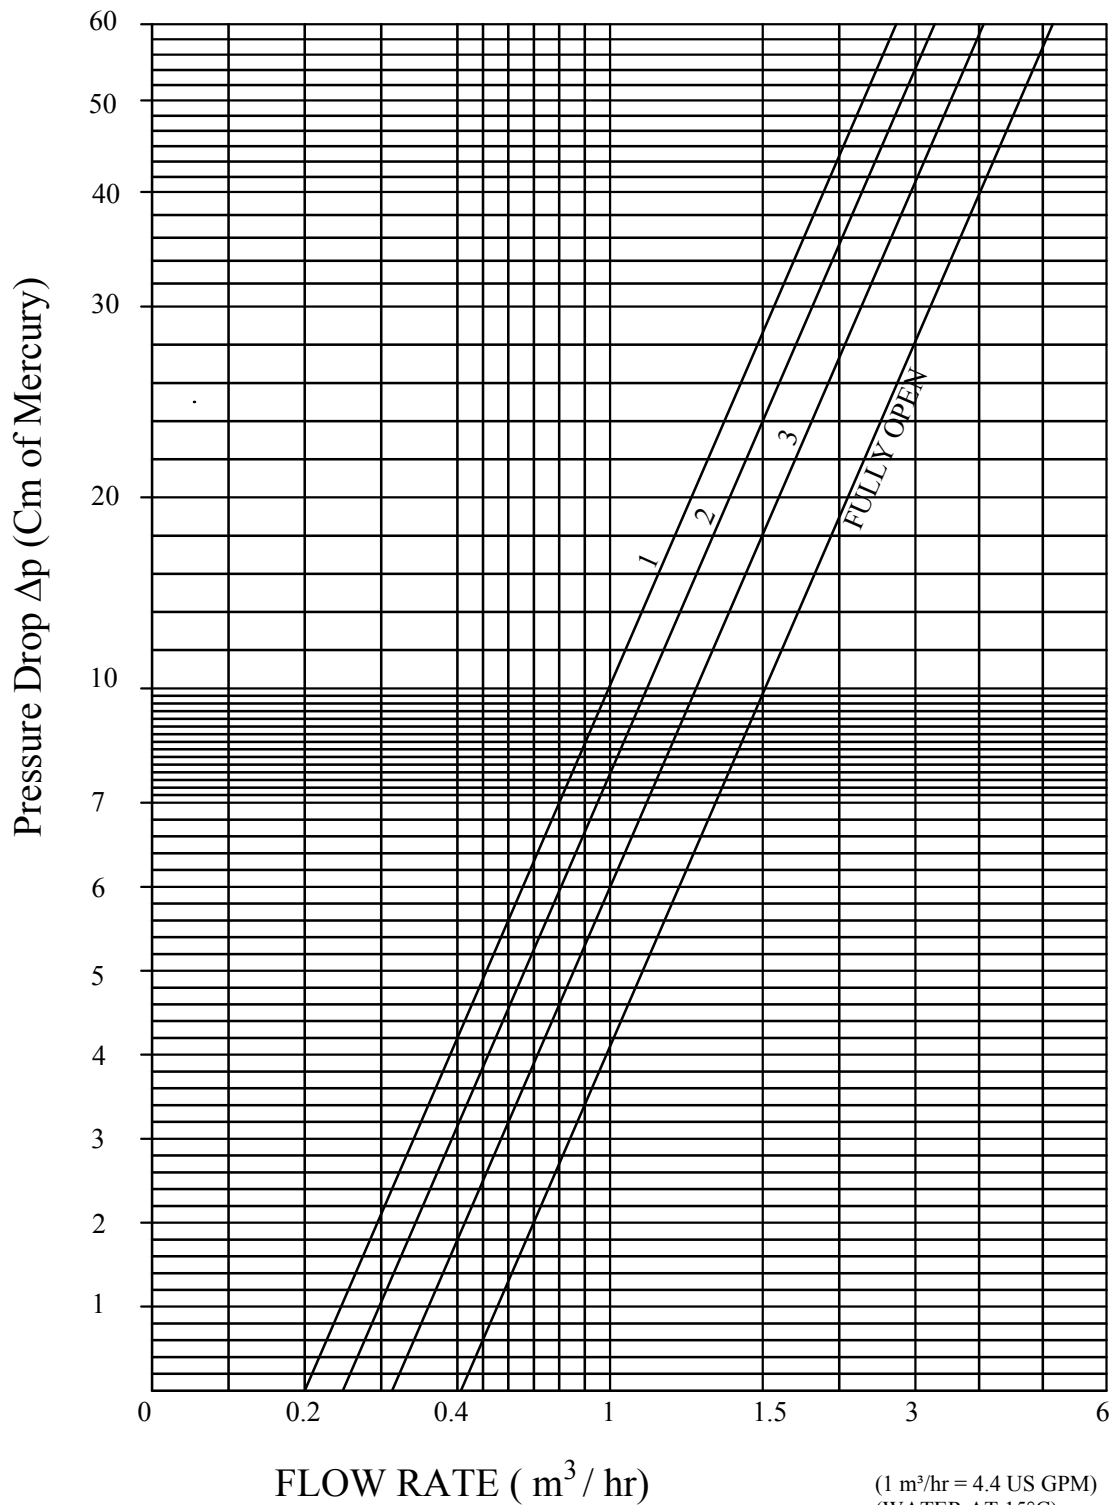

(1 m^3/hr = 4.4 US GPM)
(WATER AT 15°C)


FLOW CHARACTERISTICS OF BALANCING VALVE

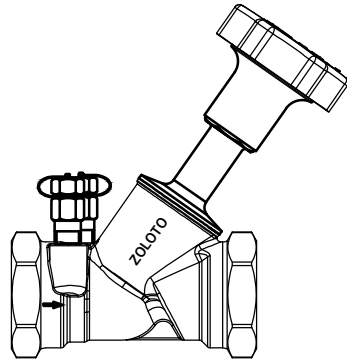



DN 25mm (1")



ZOLOTO INDUSTRIES
11th MILESTONE, LAMBRA
NAKODAR ROAD,
JALANDHAR

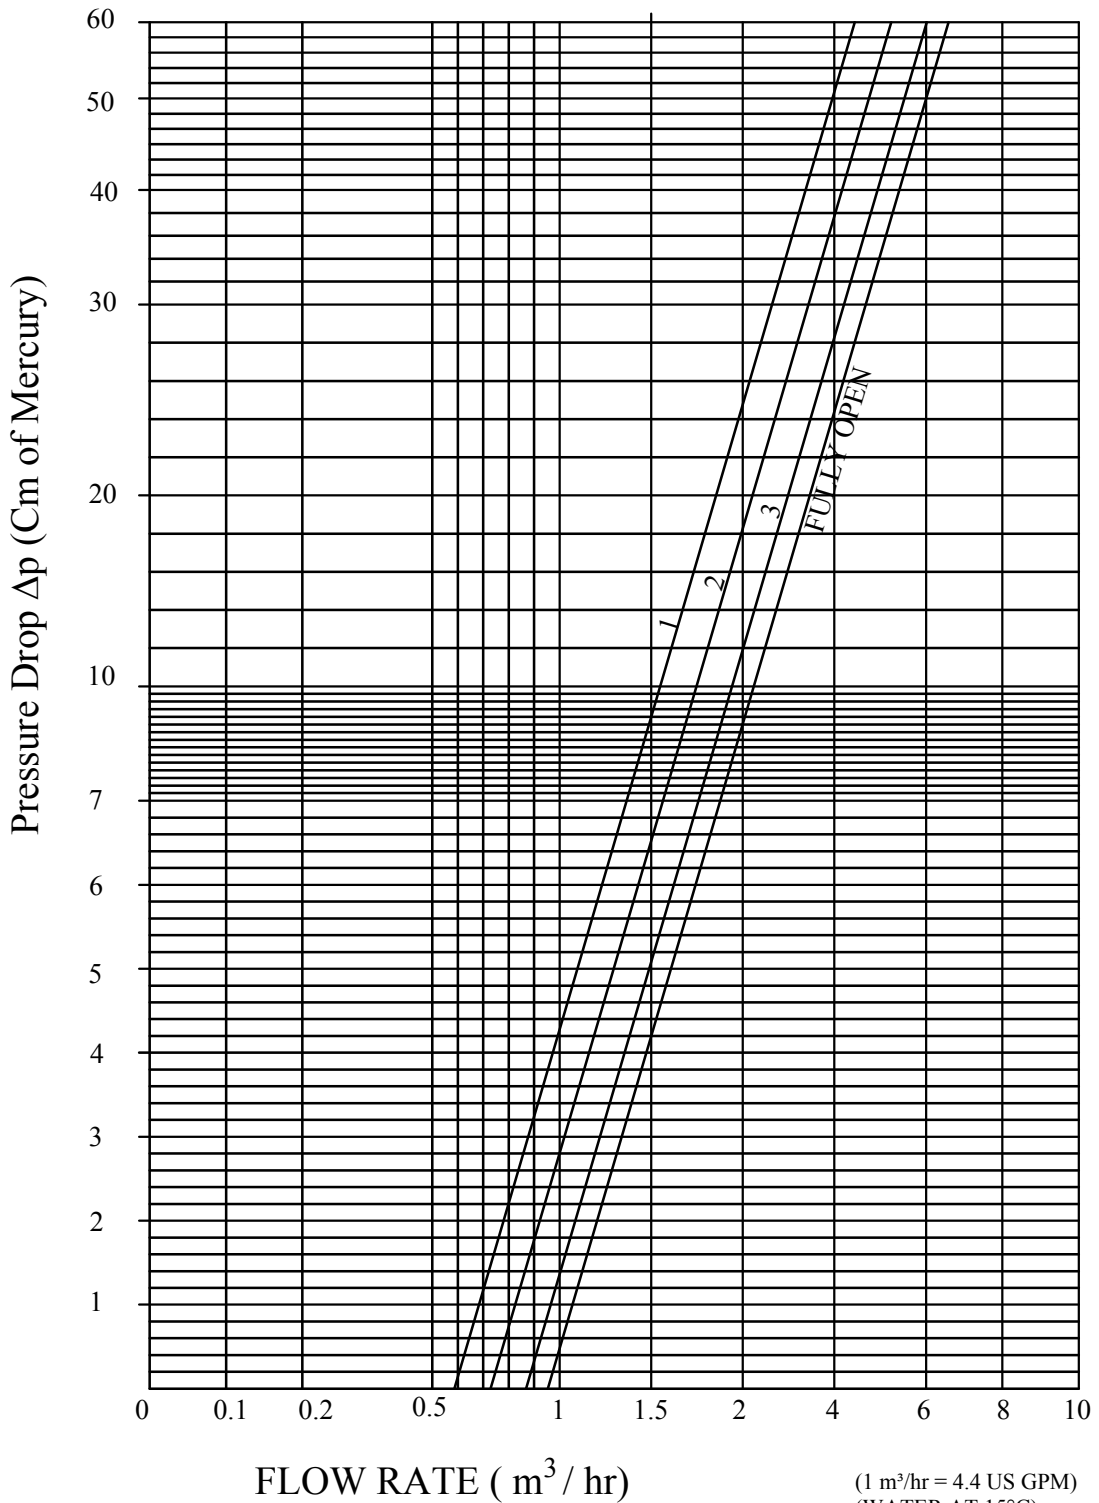


FLOW CHARACTERISTICS OF BALANCING VALVE


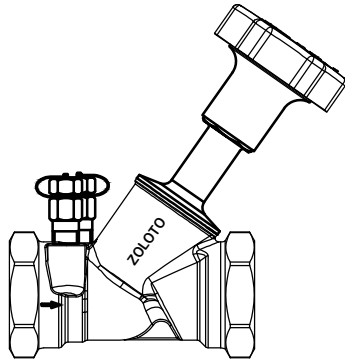


ZOLOTO INDUSTRIES
11th MILESTONE, LAMBRA
NAKODAR ROAD,
JALANDHAR

DN 32mm (1 1/4")

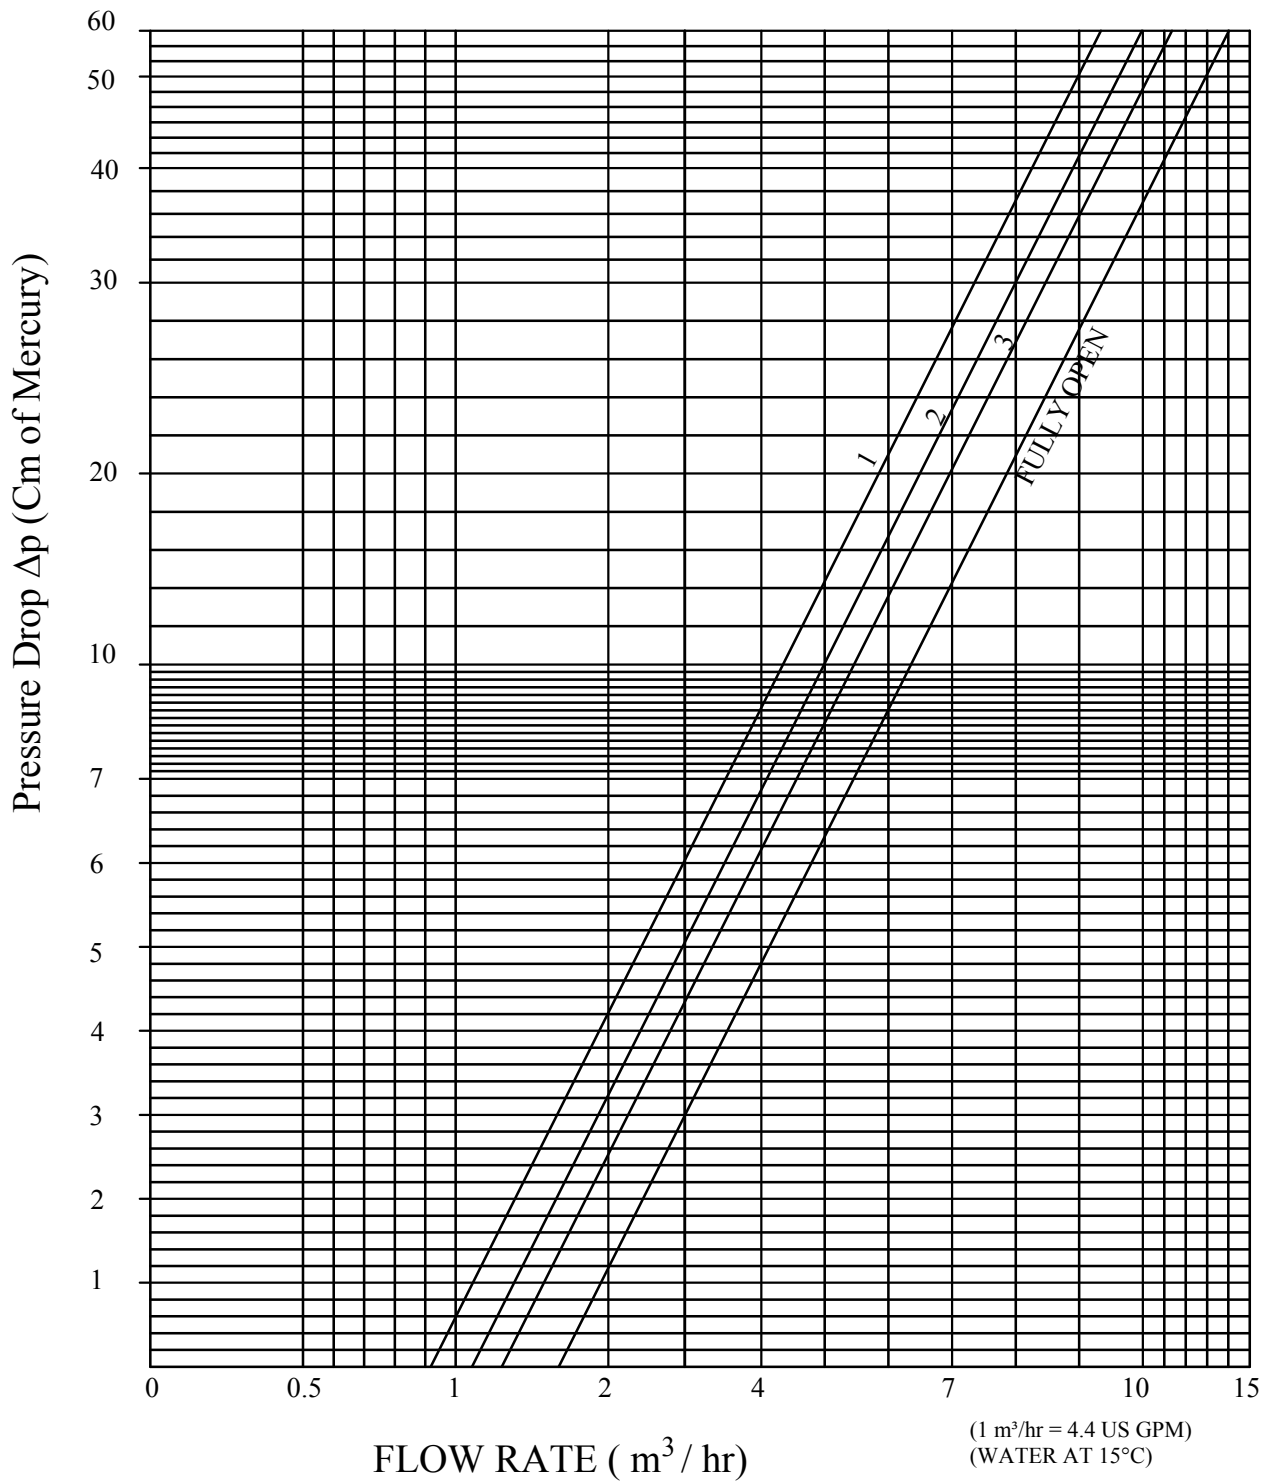


FLOW CHARACTERISTICS OF BALANCING VALVE

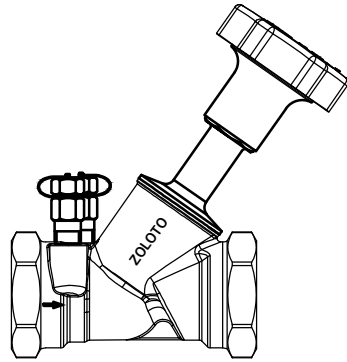


ZOLOTO INDUSTRIES
11th MILESTONE, LAMBRA
NAKODAR ROAD,
JALANDHAR

DN 40mm (1 1/2")

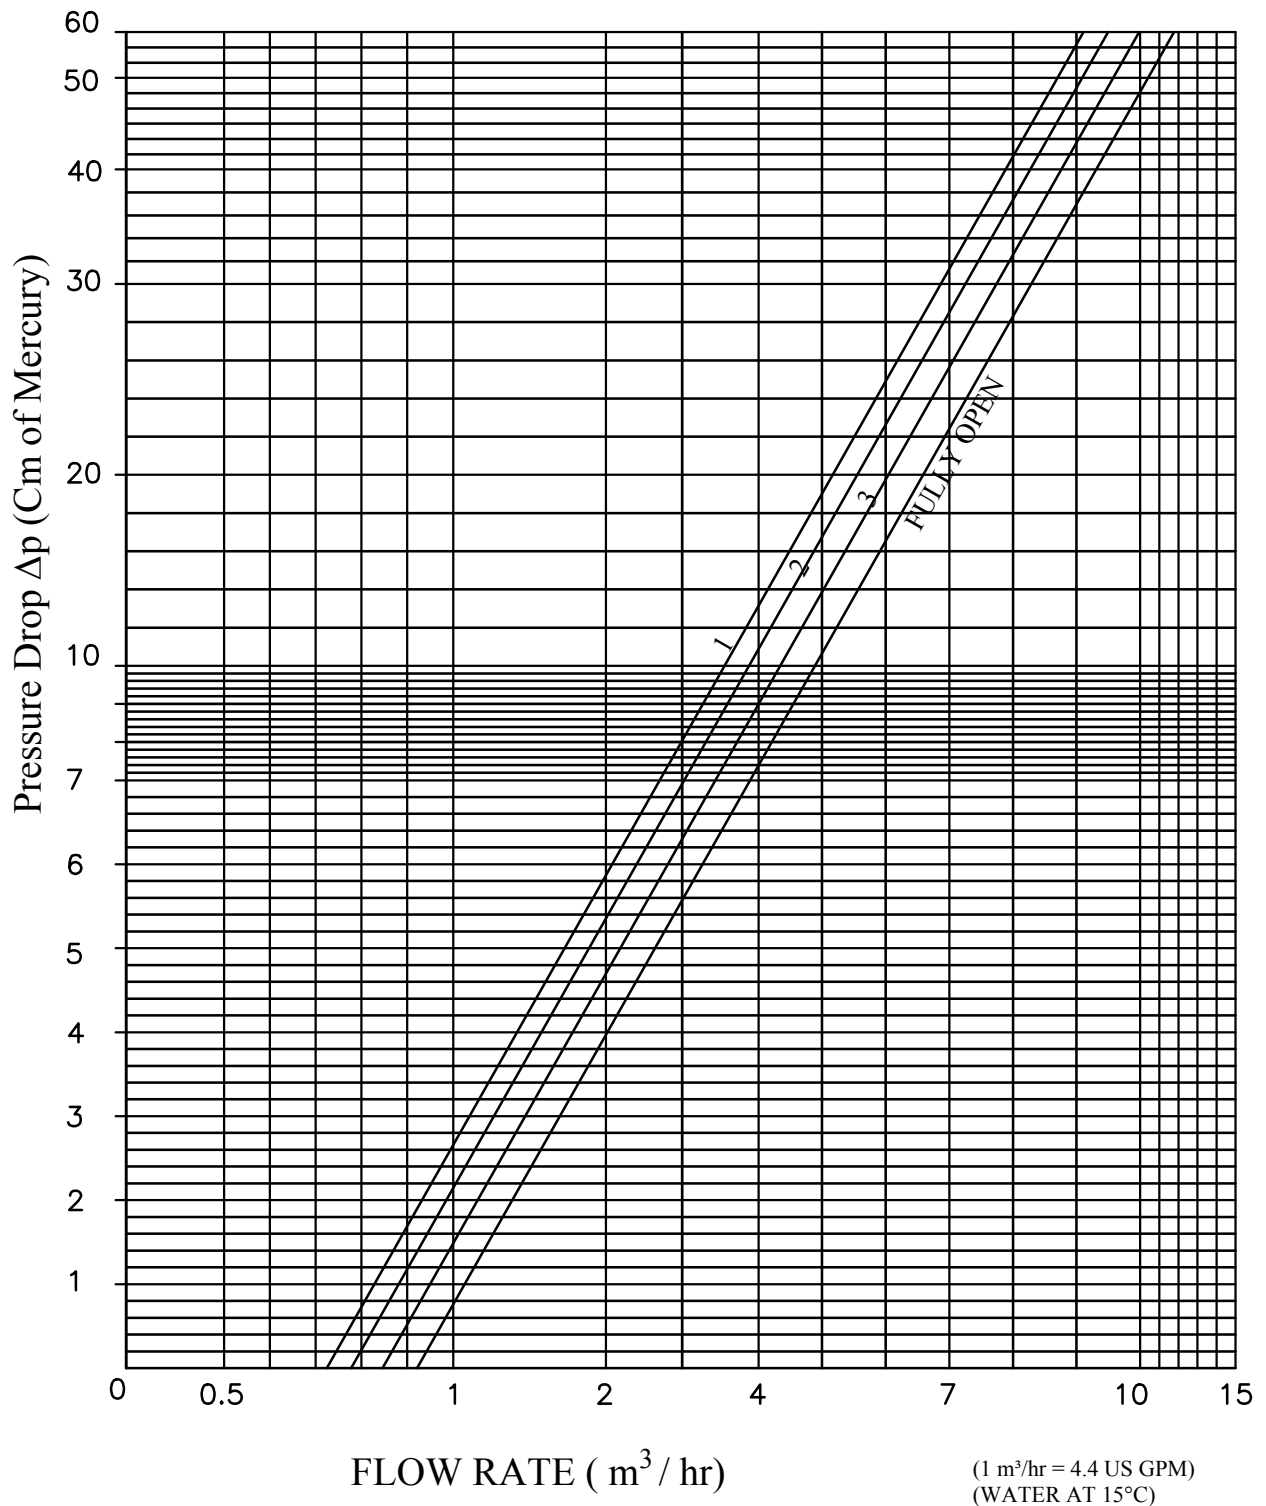

FLOW CHARACTERISTICS OF BALANCING VALVE

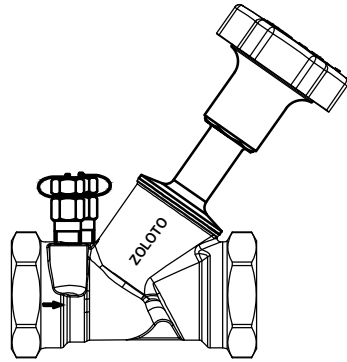

ZOLOTO INDUSTRIES
11th MILESTONE, LAMBRA
NAKODAR ROAD,
JALANDHAR

DN 50mm (2")

