ZOLOTO®
VALVES
since 1966

AN ISO 9001, 14001 & 45001
CERTIFIED COMPANY

1043 Bronze Horizontal Lift Check Valve (Screwed) I.B.R

Salient Features

- Screwed Female Ends to BSPT.
- Straight Pattern, Screwed / Bolted Cover.
- Renewable 13% Cr. Stainless Steel (S.S 410) working parts.




Test Pressure (Hydrostatic) :
Shell : 35.15 kg/cm²g (500 psig)
Working Pressure (Steam) : 17.58 kg/cm²g (250 psig)
Maximum Working Temperature : 225°C

Suitable For
Steam, Water

Materials

P.No.	Name of Part	Material of Construction	Specification	Quantity
1	Body	Bronze	IBR 282 (a) (iv) Gr. B	1
2	Body Seat Ring	Stainless Steel	ASTM A276 Type 410	1
3	Disc	Stainless Steel	ASTM A276 Type 410	1
4	Cover	Bronze	IBR 282 (a) (iv) Gr. B	1

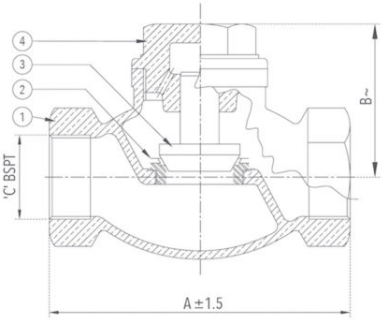

Sizes / Dimensions

Size (Inches)	Size (mm)	A ±1.5	B ~	C
1/2	15	83	55	1/2″
3/4	20	95	55	3/4″
1	25	111	65	1″
1 1/4	32	133	78	1 1/4″
1 1/2	40	152	82	1 1/2″
2	50	178	91	2″

~ ±10

ZOLOTO INDUSTRIES
Zoloto House, 11th Milestone, Lambra, Nakodar Road,
Jalandhar – 144026. Punjab. INDIA
https://www.zolotovalves.com
Phones : +91 181 4676666 (100 Lines)
Facsimile: +91 181 2792500 & 2251600
Email : sales@zolotovalves.com, mktg@zolotovalves.com